




Downlight for enhanced lighting requirements. For illuminating work-places with special risks, swimming pools or sports facilities. Robust, chlorine-resistant housing made of die-cast aluminium with optional lateral cable gland.



Technical data

Material:	die-cast aluminum
Illuminant:	1 x 12W LED-module
Luminous flux:	1652 lm
Nominal voltage AC:	230V ±10% 50/60 Hz
Nominal voltage DC:	176 - 264 V
Nominal current AC:	84 mA
Nominal current DC:	80 mA


Apparent power:	19,4 VA
Effective power:	16,7 W
Inrush current:	11 A / 68 µs
Protection class:	I
Input terminals:	2.5mm ² feed through wiring
Temperature ta:	-15...+40 °C
Impact resistance:	IK10



Articles



SN 8500 -12 FMD 230V		
Colors	HWF 9006	HWF (special)
Art. no.	101389854	101389955
ceiling mounting	Light colour: 4000 K	Protection category: IP65

Ringbolts for SN 8500/24xx Art. no. 100912635

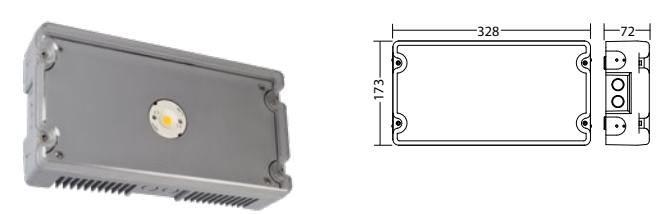

Recessed ceiling frame SN 8500, HWF 9006 Art. no. 101432593

Wall bracket SN 8500, RAL 9006 Art. no. 101432795

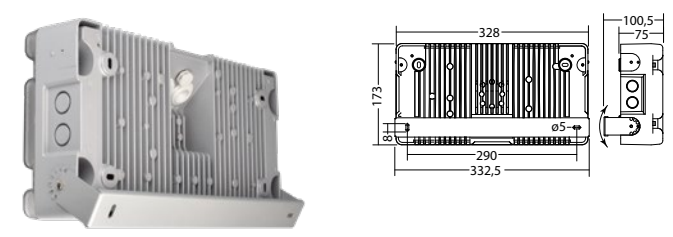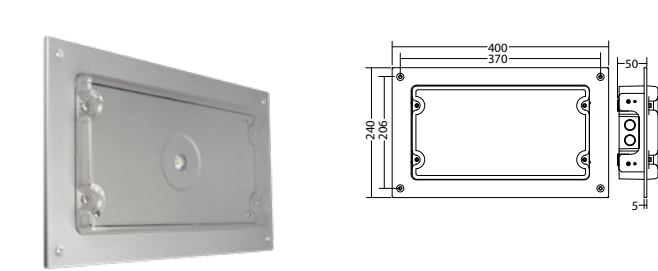

Name	Accessories	Art. no.
Haube SN 8500	spare part	50207
LM 18x18 1/4K PADS	spare part	104440203
M20 cable glands (PU 2 pcs.)	optional	104661784
Recessed ceiling frame SN 8500, HWF 9006	optional	101432593
Ringbolts for SN 8500/24xx	optional	100912635
Wall bracket SN 8500, RAL 9006	optional	101432795